

Low Pitch Roof

Account No.

Company Name

Order Number

Job Reference

Company Contact

Telephone No.


Fax No.

Delivery Address

Delivery Date Req

Quotation Ref

All dimensions to be **INTERNAL FRAME SIZE**, showing desired bar centres

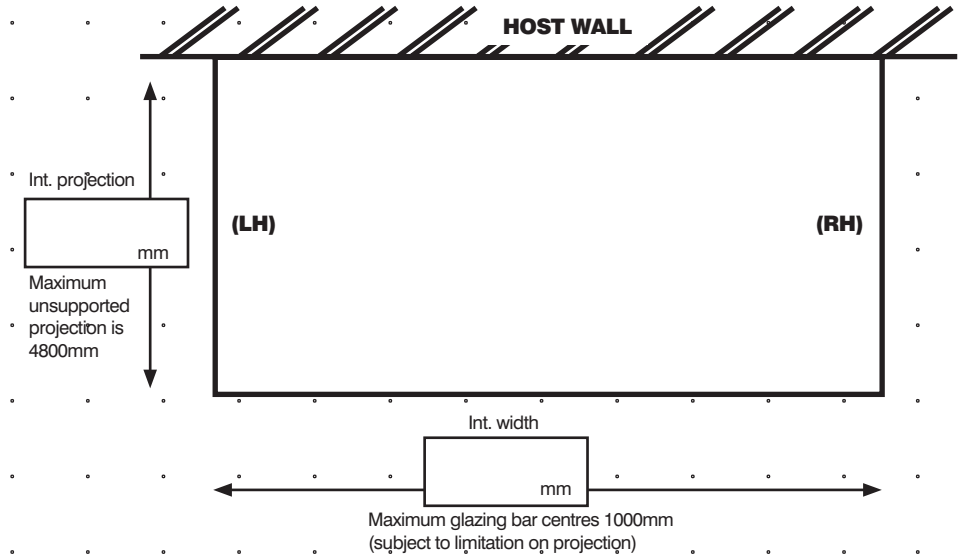

Roof site inspection
Pose code
Frame thickness

Abutment bars
Please indicate wall side details.

Box gutter
Please attach the separate box gutter order form along with this completed sheet

Roof vents
Please indicate location

Roof Pitch
Min 2.5°
Max 10.0°

COLOUR/FOIL OPTIONS

EXTERNAL COLOUR

White Deepplas (blue white) Mahogany Light Oak Rosewood

INTERNAL COLOUR

White Deepplas (blue white) Mahogany Light Oak Rosewood

GLAZING BAR OPTIONS

TOP CAPPINGS

Standard Caps Chambered Dome Chambered Bevel

UNDERCLADDINGS

Standard Decorative

POLYCARBONATE COLOUR

35mm polycarbonate roofs - 972mm is the maximum dimension from internal frame lie to the first transom bar

Clear Opal Bronze Bronze/Opal Heatguard Unglazed (for 24mm glass)

GLASS

A1 (Blue) **A2** (Grey) **B1** (Blue) **B2** (Grey) **C1** (1.2) **C2** (1.5)

CONSERVAGLASS

Blue **NC**

SPACER BAR COLOUR

Gold White

ROTABOND SEALANT

White Black

ROOF OPTIONS LEFT HAND (LH) & RIGHT HAND (RH)

Firring Short abutment Full abutment Hipped end (Plus)

LH RH LH RH LH RH LH RH

short abutment = 1/2 internal projection

FIRRING REINFORCEMENT

None Aluminium Aluminium & Steel Raked Frame

(not supplied by Ultraframe)

CONSERVAFLASH

Yes No

GUTTERING

Left Side Right Side

ROOF VENT OPTIONS

MANUAL

Chrome Brass Pole

ELECTRIC

Switch Thermo/Rain Sensor

ANCILLARIES

PLEASE SIGN BELOW & FAX BACK TO 01743 442255

DATE

SUPPLIERS OF QUALITY FRAMES TO THE TRADE