

Folding Door Order



Universal

TRADE FRAMES LTD

Yeomanry Road
Shrewsbury
Shropshire SY1 3EH
Tel: 01743 442244
Fax: 01743 442255
www.uffl.co.uk

YOUR CONTACT DETAILS

Company
Reference
Order No.
Delivery Address
Post Code
Requested Delivery
Date
Telephone
Fax
Ordered by

- QUOTE ORDER
 Glazed Unglazed

COLOUR

- White White Foil Cream Foil
 Rosewood Rosewood on White Special Foil colour:
 Oak Oak on White

NB: All doors supplied with standard 28mm bead

Size

overall Frame width (mm)	<input type="text"/>
overall Frame height (mm)	<input type="text"/>

These include any cill or add ons. Note: you must allow 10mm tolerance between your frame size and your opening size.

PROFILE

- BEVELLED PROFILE OVOLO PROFILE
 BEVELLED BEAD OVOLO BEAD B60 B62

Opening configuration Inward Outward

Multiple opening options. Up to 90% of glazed screen can be opened.

5 3, 4, 5, 6, 7 or 8 panel options can fold in or out and slide towards left or right. Optional traffic door on certain combinations of folding panels.

No responsibility will be accepted unless the doors have been installed fully square and level and in accordance with the approved code of practice for the installation of PVCu doors and windows.

Size & Weight Restrictions:

Sash rebate width:	450 to 900mm
Active sash up to	1200mm
Sash rebate height:	800 to 2400mm
Sash weight:	max. 80kg

ADD ON

- Frame Extension to Head 20mm 50mm
Frame Extension to both Jambs 20mm 50mm
Night ventilator in 50mm add-on (2 x 4000mm³) Yes

CIL requirements included in overall frame height:

- 85mm 150mm 180mm 225mm None

Hinges

- White Std Brown Satin Silver

Handle

- White Std Gold Satin Silver

COMMENTS

Inward opening doors. We strongly recommend that wherever possible doors should open inward.

On open out doors the running gear is subject to the weather and can get congested with debris which will effect the opening/closing action.


Foil option. We strongly recommend that foil options are not situated on south facing elevations due to the thermal expansion which may effect the opening/closing action of the door.

SUPPLIERS OF QUALITY FRAMES TO THE TRADE



Clearly mark on the grid shown the configuration required. The elevation of the door is as viewed from the outside. Mark along the arrows the direction that each panel has to travel.

If you have 2 swing panels, indicate on this drawing which panel you would like to open first with 'FIRST'.

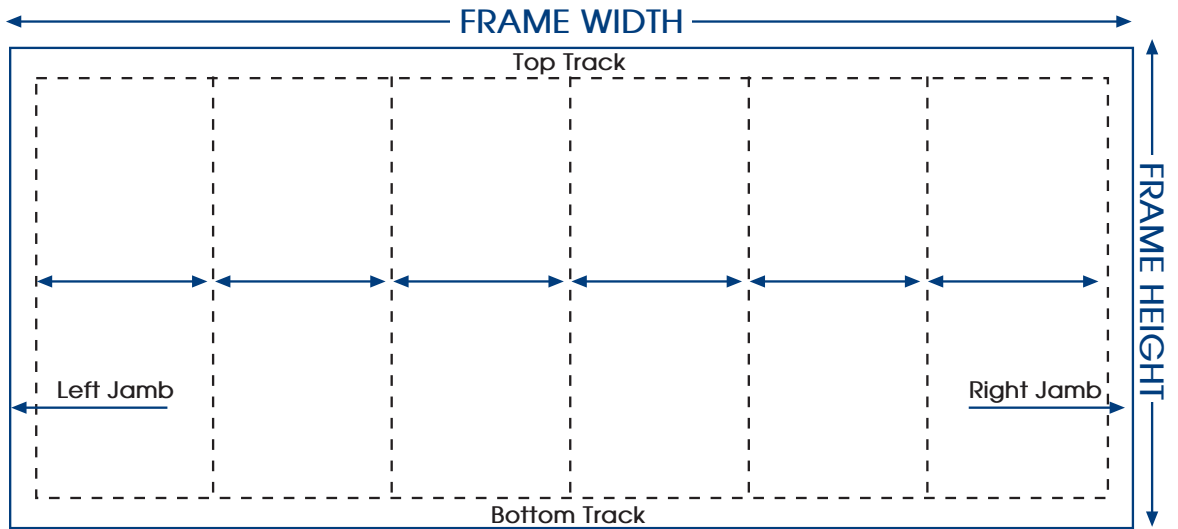

Configuration Options

DIAGRAM 330




DIAGRAM 321




DIAGRAM 431




DIAGRAM 541




DIAGRAM 550




DIAGRAM 532




DIAGRAM 651




DIAGRAM 633




DIAGRAM 761

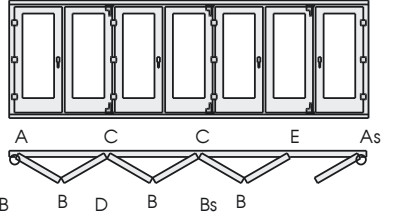


DIAGRAM 770

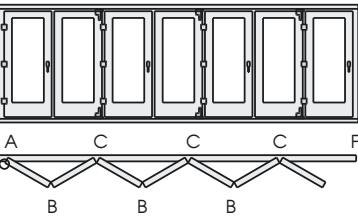


DIAGRAM 743


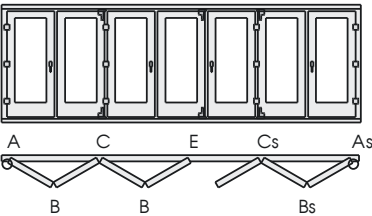


DIAGRAM 871

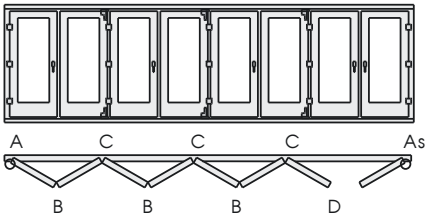

All configurations above can be manufactured using the reverse handing e.g. 321 can be reversed handed to 312.